

THE NEW VALUE FRONTIER



Hybrid cermet
for steel machining

PV710 / 720 / 730
TN610 / 620

PV710/720/730 TN610/620



High-quality surface finish and high-efficiency machining

Full lineup for a wide range of machining applications

The toughest cermet in the history of KYOCERA* - new PV730

Stability oriented



PV730



*Based on internal research conducted April 2020

Hybrid cermet for steel machining

PV720 / PV730

Three types of reinforcement techniques creates a unique hybrid cermet technology achieving high-quality surface finish and efficient machining results.

1 The toughest cermet in the history of KYOCERA - new PV730

New stability oriented PV730 added to lineup. Full lineup covers various machining applications.

High speed

PV710

General use

PV720


1st Recommendation
Excellent wear resistance

Stability oriented

PV730

Tough cermet
High stability


Fracture resistance: 2x more than competitors - Internal evaluation)

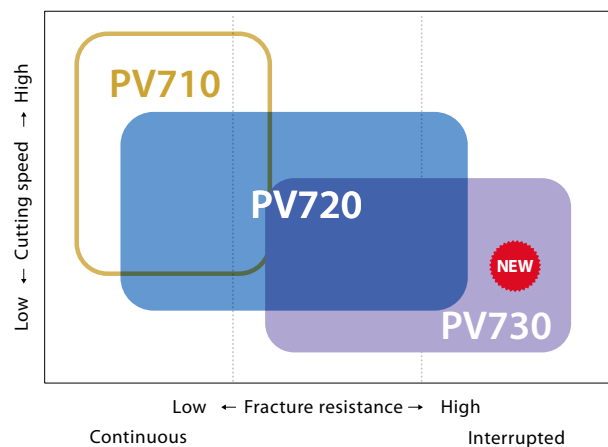


Uncoated type is also available **TN610 / TN620**

MEGACOAT NANO

Improve performance by composite lamination of MEGACOAT NANO and special TiN coating to combine high adhesion resistance and great visibility of the used cutting edge

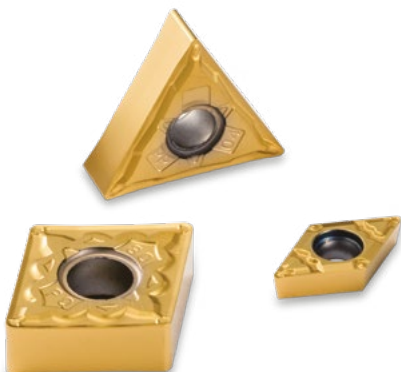

Coating properties

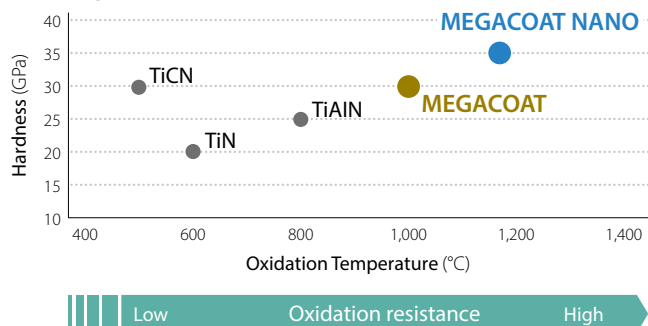


2 Three types of specialized strengthening technology (Hybrid technology)

1. High quality surface finish

High melting point "hybrid bonded phase"

Combining the conventional cermet bonded phase (nickel, cobalt) and the special high melting point metallic bonded phase.
Provides high adhesion resistance to eliminate galling of the work piece for excellent surface finish

Specialized strengthening technology 1
High melting point hybrid bonded phase




2. Excellent fracture resistance

Micro grain "hybrid hard phase"

Improved strength with uniform micro grain hard phase and superior compressive stress with high melting point bonded phase. This combination yields greater fracture resistance.

Specialized strengthening technology 2
Micro grain "hybrid hard phase"

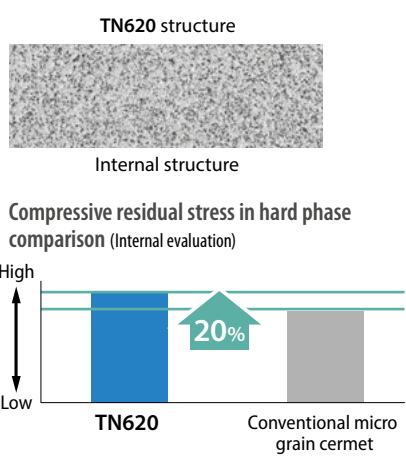


3. Superior wear resistance


Special surface-hardened "hybrid structure"

Excellent wear resistance with surface-hardened layer using gradient composition technology
Good balance of stable wear resistance and fracture resistance.
*No applicable to PV730.

Specialized strengthening technology 3
Special surface-hardened hybrid structure

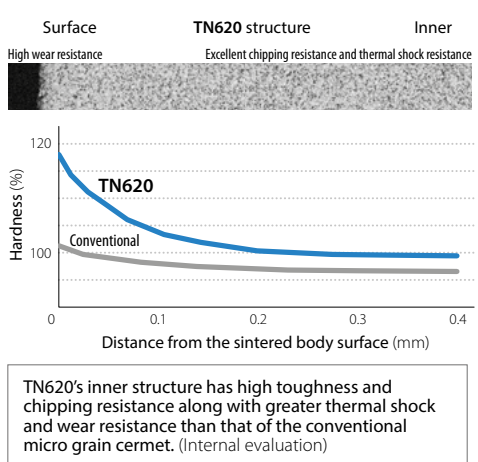


Beautiful surface finish (Internal evaluation)

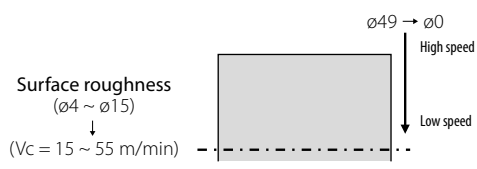


Good finish

PV720

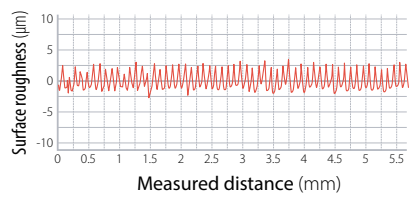

The finished surface is clouded

Competitor A

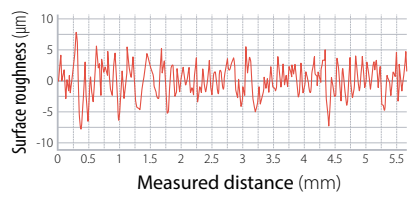


Cutting Conditions: Vc = 180 ~ 0 m/min (Constant revolutions), ap = 0.5 mm
f = 0.1 mm/rev, Wet, CNMG120404 type Workpiece: S10C

General use


PV720

1st recommendation - excellent wear resistance
High-efficiency machining and high quality surface finish

Wear resistance comparison (internal evaluation)

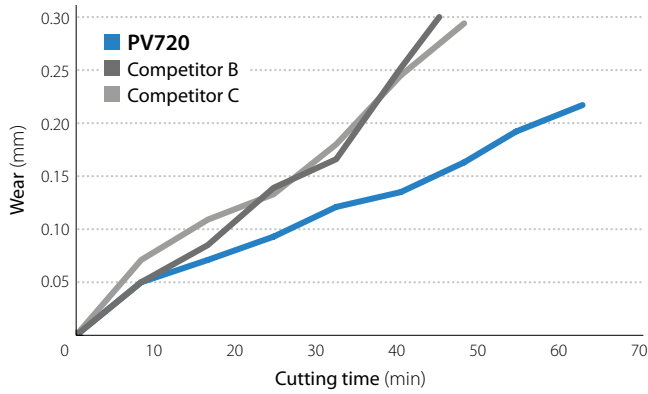


Cutting time: after 48 minutes

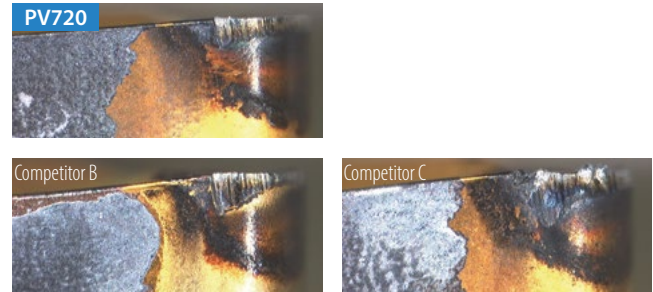

Cutting conditions: Vc = 250 m/min, ap = 1.0 mm, f = 0.2 mm/rev, Wet, CNMG120408 type, workpiece: 34CrMo4

Fracture resistance comparison (internal evaluation)

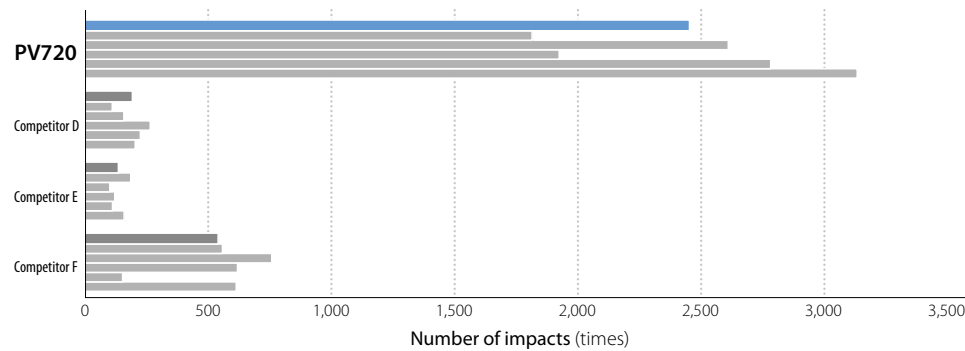


The top bar is the average value.

Cutting Conditions : Vc = 250 m/min , ap = 1.0 mm , f = 0.2 mm/rev , Wet , CNMG120408 Type Workpiece : C45 (4 grooves)

For high speed and continuous machining

PV710

Long tool life in high-speed and continuous machining

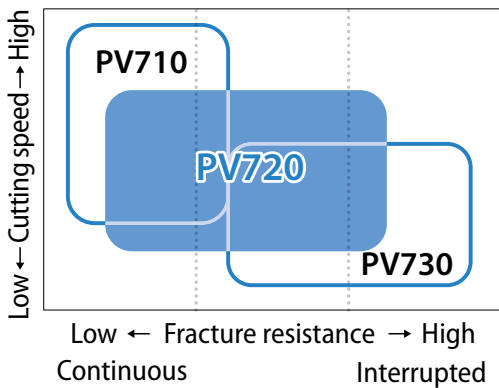


Stability oriented

PV730


The toughest cermet in kyocera history - high stability
High stability and excellent finish

New tough micro grain cermet improves fracture resistance. Good surface finish and wear resistance.

Newly developed tough cermet technology




Fracture resistance comparison (internal evaluation)


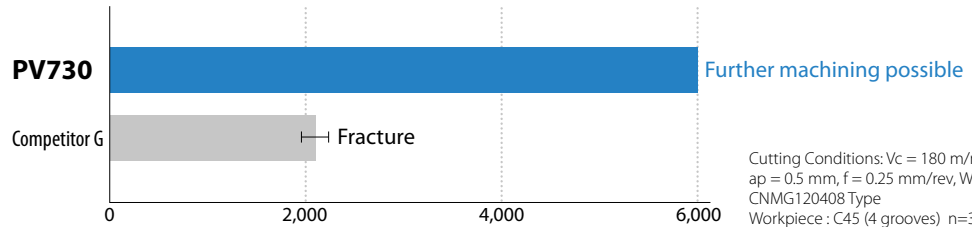


Surface roughness comparison (Internal evaluation)

PV730



Competitor H



Cutting conditions: $V_c = 100$ m/min, $a_p = 0.5$ mm, $f = 0.1$ mm/rev, Wet, CNMG120408type, workpiece: C10E

Cutting edge conditions comparison - after 40 min machining (Internal evaluation)

PV730



Competitor I



Cutting Conditions: $V_c = 250$ m/min
 $a_p = 1.0$ mm, $f = 0.2$ mm/rev, Wet
CNMG 120408 Type Workpiece: C45

Small parts machining

Molded G-class chipbreakers (sharp edge) with improved base material strength

For finishing

SKS chipbreaker

$a_p: 0.2$ mm to 1.5 mm
Excellent chip control and surface finish

NEW





For semi-finishing

SK chipbreaker

$a_p: 0.5$ mm to 3.0 mm
Three-dimensional Chipbreaker with both sharpness and chip disposal




1st recommended chipbreaker (Low cutting force)



SOLUTION

Small parts machining: SK chipbreaker (PV730) showed a good surface finish and 4x longer tool life

Valve C20



Tool Life

PV730
SK chipbreaker

(Required surface roughness: $6.3 \mu\text{m Rz}$)
3,000 pcs/corner ($4.0 \mu\text{m Rz}$)

Competitor J
PVD coated cermet

750 pcs/corner ($5.0 \mu\text{m Rz}$)

×4.0


Cutting conditions: $V_c = 160$ m/min, $a_p = 0.5$ mm, $f = 0.03$ mm/rev Wet (oil), DCGT11T302 MFP-SK PV730

Chipbreaker lineup

Smart chipbreaker P series for steel machining


PP/PQ/PG Chipbreaker

Negative type

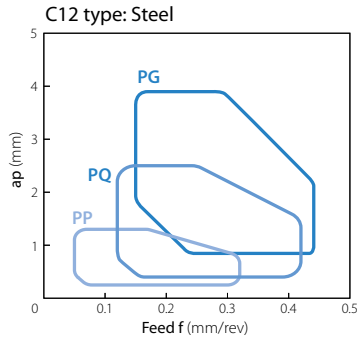

Finishing - Medium PQ chipbreaker


Suppress clogging and increase in resistance during high feed
Braking effect for a wide range of applications

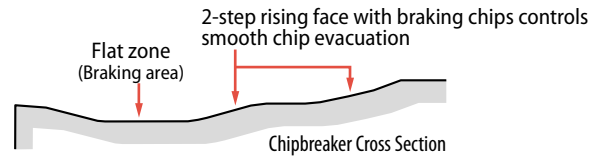

Finishing PP chipbreaker


Improves chip clogging and biting during small D.O.C. and high-feed machining

The working position changes depending on the machining conditions

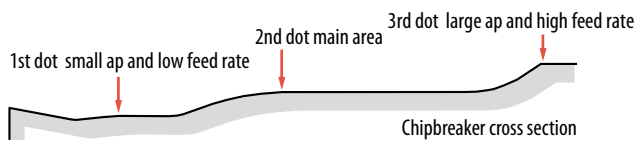

Medium - Roughing PG chipbreaker

Provides stable machining with wide chip control range

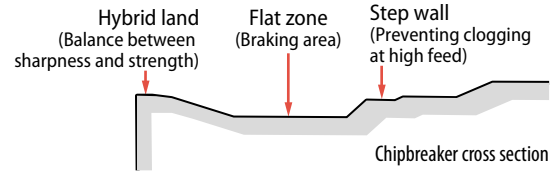


Wiper insert

WE/WF chipbreaker

Negative Type


Finishing WF chipbreaker (Wiper insert)

Chipbreaker cross section
Improved chip control with double-step design

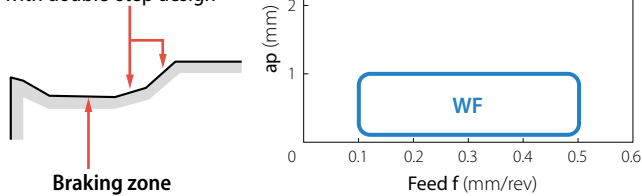

Finishing - Medium WE chipbreaker (Wiper insert)


Chipbreaker cross section
Available for a wide range of machining operations utilizing various angled steps

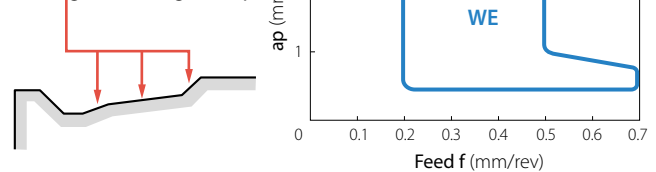

Positive type


Finishing PP chipbreaker

Improved productivity of finishing with high reliability

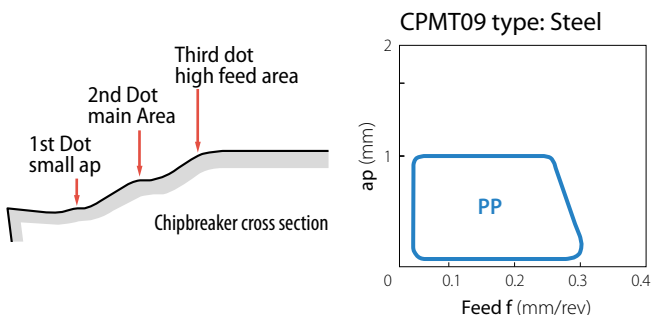





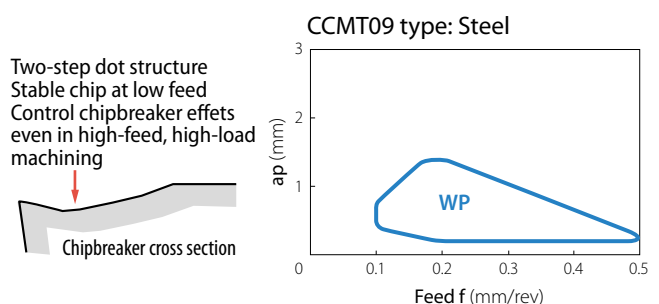

























Finishing WP chipbreaker (Wiper insert)

New design wiper edge for high productivity



Inserts (Negative)








Shape	Description	Dimensions (mm)							
		IC dia.	Thick-ness	Hole dia.	RE	PV710	PV720	PV730	TNG10
 Finishing / with wiper edge	CNMG 120404 WF 120408 WF	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Finishing / with wiper edge	CNMG 120404 WP 120408 WP	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Finishing - medium / with wiper edge	CNMG 120404 WE 120408 WE 120412 WE	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing - medium / with wiper edge	CNMG 120404 WQ 120408 WQ 120412 WQ	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing	CNMG 120402 PP 120404 PP 120408 PP 120412 PP	12.70	4.76	5.16	0.2	●	●	●	●
					0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing	CNMG 090404 GP 090408 GP	9.525	4.76	3.81	0.4	●	●	●	●
					0.8	●	●	●	●
 Finishing	CNMG 120402 GP 120404 GP 120408 GP	12.70	4.76	5.16	0.2	●	●	●	●
					0.4	●	●	●	●
					0.8	●	●	●	●
 Finishing - medium	CNMG 120404 PQ 120408 PQ 120412 PQ	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing - medium	CNMG 090404 HQ 090408 HQ	9.525	4.76	3.81	0.4	●	●	●	●
					0.8	●	●	●	●
 Finishing - medium	CNMG 120404 HQ 120408 HQ 120412 HQ	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing - medium/up facing	CNMG 120404 CQ 120408 CQ	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Medium-roughing	CNMG 090404 GS 090408 GS	9.525	4.76	3.81	0.4	●	●	●	●
					0.8	●	●	●	●
 Medium-roughing	CNMG 120404 PG 120408 PG 120412 PG	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Medium-roughing	CNMG 120404 PS 120408 PS	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Roughing	CNMG 120404 120408	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●










Shape Show right hand (R)	Description	Dimensions (mm)							
		IC dia.	Thick-ness	Hole dia.	RE	PV710	PV720	PV730	TNG10
 Mild steel, finishing, and small cuts	CNMG 120404 XF 120408 XF	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Mild steel and finishing	CNMG 120404 XP 120408 XP	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Mild steel and medium cutting	CNMG 120404 XQ 120408 XQ	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Mild steel and roughing	CNMG 120408 XS	12.70	4.76	5.16	0.8	●	●	●	●
					0.8	●	●	●	●
 Finished to medium and sharp edges - specular	CNGG 120402MFP-SK 120404MFP-SK	12.70	4.76	5.16	<0.2			●	
					<0.4			●	
 Finishing, emphasizing surface roughness, sharp edges	CNGG 090402 R/L-S 090404 R/L-S 090408 R/L-S	9.525	4.76	3.81	0.2	●	●	●	●
					0.4	●	●	●	●
					0.8	●	●	●	●
 Intermediate cutting	CNGG 120404 R/L 120408 R/L	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Medium to rough and low resistance	CNGG 120404 R/L-25R 120408 R/L-25R	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
 Finishing / with wiper edge	DNMX 150404 WF 150408 WF 150412 WF	12.70	4.76	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing / with wiper edge	DNMX 150604 WF 150608 WF 150612 WF	12.70	6.35	5.16	0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing	DNMG 150402 PP 150404 PP 150408 PP 150412 PP	12.70	4.76	5.16	0.2	●	●	●	●
					0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing	DNMG 150602 PP 150604 PP 150608 PP 150612 PP	12.70	6.35	5.16	0.2	●	●	●	●
					0.4	●	●	●	●
					0.8	●	●	●	●
					1.2	●	●	●	●
 Finishing	DNMG 110404 GP 110408 GP	9.525	4.76	3.81	0.4	●	●	●	●
					0.8	●	●	●	●
 Finishing	DNMG 150402 GP 150404 GP 150408 GP	12.70	4.76	5.16	0.2	●	●	●	●
					0.4	●	●	●	●
					0.8	●	●	●	●
 Finishing	DNMG 150602 GP 150604 GP 150608 GP	12.70	6.35	5.16	0.2	●	●	●	●
					0.4	●	●	●	●
					0.8	●	●	●	●

An insert which corner R(RE) dimension is shown with inequality sign(EX: <0.1, <0.2) indicates minus tolerance of corner R(RE)

● : Available














Inserts (Negative)












Shape	Description	Dimensions (mm)				PV710	PV720	PV730	TNG10	TNG20
		IC dia.	Thick-ness	Hole dia.	RE					
	DNMG 150404 PQ	12.70	4.76	5.16	0.4	●	●	●	●	
	150408 PQ				0.8	●	●	●	●	
	150412 PQ				1.2	●	●	●	●	
Finishing – medium	DNMG 150604 PQ	12.70	6.35	5.16	0.4	●	●	●	●	
	150608 PQ				0.8	●	●	●	●	
	150612 PQ				1.2	●	●	●	●	
	DNMG 110402 HQ	9.525	4.76	3.81	0.2	●	●	●	●	
	110404 HQ				0.4	●	●	●	●	
	DNMG 150404 HQ	12.70	4.76	5.16	0.4	●	●	●	●	
150408 HQ	0.8				●	●	●	●		
150412 HQ	1.2				●	●	●	●		
Finishing – medium	DNMG 150604 HQ	12.70	6.35	5.16	0.4	●	●	●	●	
	150608 HQ				0.8	●	●	●	●	
	150612 HQ				1.2	●	●	●	●	
	DNMG 150404 CQ	12.70	4.76	5.16	0.4	●	●	●	●	
	150408 CQ				0.8	●	●	●	●	
	150412 CQ				1.2	●	●	●	●	
Finishing – medium/raised	DNMG 150604 CQ	12.70	6.35	5.16	0.4	●	●	●	●	
	DNMG 110404 GS	9.525	4.76	3.81	0.4	●	●	●	●	
	110408 GS				0.8	●	●	●	●	
Medium to coarse	DNMG 150404 GS	12.70	4.76	5.16	0.4	●	●	●	●	
	150408 GS				0.8	●	●	●	●	
	DNMG 150604 GS				1.2	●	●	●	●	
	DNMG 150404 PG	12.70	4.76	5.16	0.4	●	●	●	●	
	150408 PG				0.8	●	●	●	●	
	150412 PG				1.2	●	●	●	●	
Medium to coarse	DNMG 150604 PG	12.70	6.35	5.16	0.4	●	●	●	●	
	150608 PG				0.8	●	●	●	●	
	150612 PG				1.2	●	●	●	●	
	DNMG 150404 PS	12.70	4.76	5.16	0.4	●	●	●	●	
	150408 PS				0.8	●	●	●	●	
Medium to coarse	DNMG 150404	12.70	4.76	5.16	0.4	●	●	●	●	
	150408				0.8	●	●	●	●	
Roughing	DNMG 150404 XF	12.70	4.76	5.16	0.4	●	●	●	●	
Mild steel, finishing, and small cuts	150408 XF				0.8	●	●	●	●	
	DNMG 150404 XP	12.70	4.76	5.16	0.4	●	●	●	●	
	150408 XP				0.8	●	●	●	●	
Mild steel and finishing	DNMG 150604 XP	12.70	6.35	5.16	0.4	●	●	●	●	
	150608 XP				0.8	●	●	●	●	
	DNMG 150404 XQ	12.70	4.76	5.16	0.4	●	●	●	●	
	150408 XQ				0.8	●	●	●	●	
Mild steel and medium cutting	DNMG 150408 XS	12.70	4.76	5.16	0.8	●	●	●	●	
Mild steel and roughing	DNGG 150402MFP-SK	12.70	4.76	5.16	<0.2	●	●	●	●	
Finished to medium and sharp edges - specular	150404MFP-SK				<0.4	●	●	●	●	

Shape Show right hand (R)	Description	Dimensions (mm)				PV710	PV720	PV730	TNG10	TNG20
		IC dia.	Thick-ness	Hole dia.	RE					
	DNGG 150404 R/L	12.70	4.76	5.16	0.4	●	●	●	●	
	150408 R/L				0.8	●	●	●	●	
Intermediate cutting	RNMG 090300	9.525	3.18	3.81	–	●	●	●	●	
	RNMG 120400	12.70	4.76	5.16	–	●	●	●	●	
	Medium to coarse				–	●	●	●	●	
	SNMG 120404 PQ	12.70	4.76	5.16	0.4	●	●	●	●	
	120408 PQ				0.8	●	●	●	●	
Finishing – medium	SNMG 120404 HQ	12.70	4.76	5.16	0.4	●	●	●	●	
Finishing – medium	120408 HQ				0.8	●	●	●	●	
	120412 HQ				1.2	●	●	●	●	
	SNMG 120408 PG	12.70	4.76	5.16	0.8	●	●	●	●	
	120412 PG				1.2	●	●	●	●	
120416 PG	1.6				●	●	●	●		
Medium to coarse	SNMG 090304	9.525	3.18	3.81	0.4	●	●	●	●	
Roughing	090308				0.8	●	●	●	●	
	SNMG 120404	12.70	4.76	5.16	0.4	●	●	●	●	
	120408				0.8	●	●	●	●	
	120412				1.2	●	●	●	●	
	120416				1.6	●	●	●	●	
120420	2.0				●	●	●	●		
	SNMG 120408 XP	12.70	4.76	5.16	0.8	●	●	●	●	
	Low carbon steel/finishing	●	●	●	●	●				
	SNMG 120408 XQ	12.70	4.76	5.16	0.8	●	●	●	●	
	Low carbon steel/finishing	●	●	●	●	●				
	SNMG 120408 XS	12.70	4.76	5.16	0.8	●	●	●	●	
	Low carbon steel/roughing	●	●	●	●	●				
	SNGG 090304 R/L-B	9.525	3.18	3.81	0.4	●	●	●	●	
	090308 R/L-B				0.8	●	●	●	●	
	B: finishing - medium C: medium - roughing	SNGG 120404 R/L-C	12.70	4.76	5.16	0.4	●	●	●	●
120408 R/L-C		0.8				●	●	●	●	
	SNGG 120404 R/L-25R	12.70	4.76	5.16	0.4	●	●	●	●	
	120408 R/L-25R				0.8	●	●	●	●	
Medium-roughing / low cutting resistance	TNMX 160404 WF	9.525	4.76	3.81	0.4	●	●	●	●	
Finishing / with wiper edge	160408 WF				0.8	●	●	●	●	
	160412 WF				1.2	●	●	●	●	

An insert which corner R(RE) dimension is shown with inequality sign(EX: <0.1, <0.2) indicates minus tolerance of corner R(RE)

Inserts (Negative)














Shape	Description	Dimensions (mm)								
		IC dia.	Thick-ness	Hole dia.	RE	PV710	PV720	PV730	TNG10	TNG20
 Finishing	TNMG 160402 PP	9.525	4.76	3.81	0.2	●	●	●	●	●
	160404 PP				0.4	●	●	●	●	●
	160408 PP				0.8	●	●	●	●	●
	160412 PP				1.2	●	●	●	●	●
 Finishing	TNMG 110404 GP	6.35	4.76	2.26	0.4	●	●	●	●	
	110408 GP				0.8	●	●	●	●	
	TNMG 160402 GP	9.525	4.76	3.81	0.2	●	●	●	●	
	160404 GP				0.4	●	●	●	●	
160408 GP	0.8	●	●	●	●	●				
 Finishing ~ medium	TNMG 160404 PQ	9.525	4.76	3.81	0.4	●	●	●	●	
	160408 PQ				0.8	●	●	●	●	
	160412 PQ				1.2	●	●	●	●	
 Finishing ~ medium	TNMG 110404 HQ	6.35	4.76	2.26	0.4	●	●	●	●	
	110408 HQ				0.8	●	●	●	●	
	TNMG 160404 HQ	9.525	4.76	3.81	0.4	●	●	●	●	
	160408 HQ				0.8	●	●	●	●	
160412 HQ	1.2	●	●	●	●	●				
 Finishing ~ medium/raised	TNMG 160404 CQ	9.525	4.76	3.81	0.4	●	●	●	●	
	160408 CQ				0.8	●	●	●	●	
	160412 CQ				1.2	●	●	●	●	
 Medium to coarse	TNMG 110404 GS	6.35	4.76	2.26	0.4	●	●	●	●	
	TNMG 160404 GS	9.525	4.76	3.81	0.4	●	●	●	●	
	TNMG 160408 GS				0.8	●	●	●	●	
 Medium to coarse	TNMG 160404 PG	9.525	4.76	3.81	0.4	●	●	●	●	
	160408 PG				0.8	●	●	●	●	
	160412 PG				1.2	●	●	●	●	
 Medium to coarse	TNMG 160404 PS	9.525	4.76	3.81	0.4	●	●	●	●	
	160408 PS				0.8	●	●	●	●	
 Roughing	TNMG 160404	9.525	4.76	3.81	0.4	●	●	●	●	
	160408				0.8	●	●	●	●	
	160412				1.2	●	●	●	●	
TNMG 220408	12.70	4.76	5.16	0.8	●	●	●	●		
 Mild steel, finishing, and small cuts	TNMG 160404 XF	9.525	4.76	3.81	0.4	●	●	●	●	
	160408 XF				0.8	●	●	●	●	
 Mild steel and finishing	TNMG 160404 XP	9.525	4.76	3.81	0.4	●	●	●	●	
	160408 XP				0.8	●	●	●	●	
 Mild steel and medium cutting	TNMG 160404 XQ	9.525	4.76	3.81	0.4	●	●	●	●	
	160408 XQ				0.8	●	●	●	●	
 Mild steel and roughing	TNMG 160408 XS	9.525	4.76	3.81	0.8	●	●	●	●	















Shape Show right hand (R)	Description	Dimensions (mm)							
		IC dia.	Thick-ness	Hole dia.	RE	PV710	PV720	PV730	TNG10
 Finishing ~ medium	TNGG 160402 M-SK	9.525	4.76	3.81	<0.2	●	●	●	●
	160404 M-SK				<0.4	●	●	●	●
 Finished to medium and sharp edge mirror finish	TNGG 160401MFP-SK	9.525	4.76	3.81	<0.1	●	●	●	●
	160402MFP-SK				<0.2	●	●	●	●
	160404MFP-SK				<0.4	●	●	●	●
 Medium to coarse	TNMG 160404 R/L-ST	9.525	4.76	3.81	0.4	●	●	●	●
	160408 R/L-ST				0.8	●	●	●	●
 Without chipbreaker Superfine	TNMA 160404	9.525	4.76	3.81	0.4	●	●	●	●
	160408				0.8	●	●	●	●
 Finishing and sharp edges For precision machining	TNEG 160402 R/L-SSF	9.525	4.76	3.81	0.2	●	●	●	●
	160404 R/L-SSF				0.4	●	●	●	●
 Emphasis on finishing and surface roughness Sharp edge	TNGG 160401 R/L-S	9.525	4.76	3.81	0.1	●	●	●	●
	160402 R/L-S				0.2	●	●	●	●
	160404 R/L-S				0.4	●	●	●	●
	160408 R/L-S				0.8	●	●	●	●
 B: finish to medium C: medium to coarse	TNGG 110302 R/L-B	6.35	3.18	2.26	0.2	●	●	●	●
	110304 R/L-B				0.4	●	●	●	●
	TNGG 160402 R/L-B	9.525	4.76	3.81	0.2	●	●	●	●
	160404 R/L-B				0.4	●	●	●	●
	160408 R/L-B				0.8	●	●	●	●
	TNGG 160402 R/L-C	9.525	4.76	3.81	0.2	●	●	●	●
160404 R/L-C	0.4				●	●	●	●	
160408 R/L-C	0.8				●	●	●	●	
160412 R/L-C	1.2				●	●	●	●	
TNGG 220404 R/L-C	12.70	4.76	5.16	0.4	●	●	●	●	
220408 R/L-C				0.8	●	●	●	●	
TNMG 160404 R/L-C	9.525	4.76	3.81	0.4	●	●	●	●	
160408 R/L-C				0.8	●	●	●	●	
 Medium to rough and low resistance	TNGG 160404 R/L-25R	9.525	4.76	3.81	0.4	●	●	●	●
	160408 R/L-25R				0.8	●	●	●	●
 Finishing	VNMG 160402 PP	9.525	4.76	3.81	0.2	●	●	●	●
	160404 PP				0.4	●	●	●	●
	160408 PP				0.8	●	●	●	●
	160412 PP				1.2	●	●	●	●
 Finishing	VNMG 160402 GP	9.525	4.76	3.81	0.2	●	●	●	●
	160404 GP				0.4	●	●	●	●
	160408 GP				0.8	●	●	●	●
 Finishing ~ medium	VNMG 160404 R/L-VC	9.525	4.76	3.81	0.4	●	●	●	●
	160408 R/L-VC				0.8	●	●	●	●
	160412 R/L-VC				1.2	●	●	●	●

An insert which corner R(RE) dimension is shown with inequality sign(EX: <0.1, <0.2) indicates minus tolerance of corner R(RE)

● : Available

Inserts (Negative)

Shape Show right hand (R)	Description	Dimensions (mm)				PV710	PV720	PV730	TNG10	TNG20
		IC dia.	Thick-ness	Hole dia.	RE					
 Finishing ~ medium	VNMG 160404 VF	9.525	4.76	3.81	0.4	●	●	●	●	●
	160408 VF				0.8	●	●	●	●	●
	160412 VF				1.2	●	●	●	●	●
 Finishing ~ medium	VNMG 160404 PQ	9.525	4.76	3.81	0.4	●	●	●	●	●
	160408 PQ				0.8	●	●	●	●	●
	160412 PQ				1.2	●	●	●	●	●
 Finishing ~ medium	VNMG 160404 HQ	9.525	4.76	3.81	0.4	●	●	●	●	●
	160408 HQ				0.8	●	●	●	●	●
	160412 HQ				1.2	●	●	●	●	●
 Roughing	VNMG 160404	9.525	4.76	3.81	0.4	●	●	●	●	●
	160408				0.8	●	●	●	●	●
 Finishing ~ medium	VNGG 160402 M-SK	9.525	4.76	3.81	<0.2	●	●	●	●	●
	160404 M-SK				<0.4	●	●	●	●	●
 Finished to medium and sharp edges Specular	VNGG160402MFP-SK	9.525	4.76	3.81	<0.2					●
	160404MFP-SK				<0.4					
 Emphasis on finishing and surface roughness → Sharp edge	VNGG 160402 R/L-S	9.525	4.76	3.81	0.2	●	●			●
	160404 R/L-S				0.4	●	●			●
 Intermediate cutting	VNGG 160402 R/L	9.525	4.76	3.81	0.2	●	●	●	●	●
	160404 R/L				0.4	●	●	●	●	●
	160408 R/L				0.8	●	●	●	●	●
 Finishing / with wiper edge	WNMG 080404 WF	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 WF				0.8	●	●	●	●	●
 Finishing / with wiper edge	WNMG 080404 WP	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 WP				0.8	●	●	●	●	●
 Finishing ~ with cutting blade for middle and wiper blades	WNMG 080404 WE	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 WE				0.8	●	●	●	●	●
	080412 WE				1.2	●	●	●	●	●
 Finishing ~ with cutting blade for middle and wiper blades	WNMG 080404 WQ	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 WQ				0.8	●	●	●	●	●
	080412 WQ				1.2	●	●	●	●	●
 Finishing	WNMG 080402 PP	12.70	4.76	5.16	0.2	●	●	●	●	●
	080404 PP				0.4	●	●	●	●	●
	080408 PP				0.8	●	●	●	●	●
	080412 PP				1.2	●	●	●	●	●

Shape Show right hand (R)	Description	Dimensions (mm)				PV710	PV720	PV730	TNG10	TNG20
		IC dia.	Thick-ness	Hole dia.	RE					
 Finishing	WNMG 060404 GP	9.525	4.76	3.81	0.4					●
	060408 GP				0.8					●
 Finishing	WNMG 080404 GP	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 GP				0.8	●	●	●	●	●
 Finishing ~ medium	WNMG 080404 PQ	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 PQ				0.8	●	●	●	●	●
 Finishing ~ medium	WNMG 06T304 HQ	9.525	3.97	3.81	0.4					●
	WNMG 060404 HQ	9.525	4.76	3.81	0.4					●
	060408 HQ	9.525	4.76	3.81	0.8					●
 Finishing ~ medium	WNMG 080404 HQ	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 HQ				0.8	●	●	●	●	●
	080412 HQ				1.2	●	●	●	●	●
 Finishing ~ medium/raised	WNMG 080404 CQ	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 CQ				0.8	●	●	●	●	●
	080412 CQ				1.2	●	●	●	●	●
 Medium to coarse	WNMG 060404 GS	9.525	4.76	3.81	0.4					●
	060408 GS				0.8					●
 Medium to coarse	WNMG 080404 GS	12.70	4.76	5.16	0.4					●
	080408 GS				0.8					●
 Medium to coarse	WNMG 080404 PG	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 PG				0.8	●	●	●	●	●
 Medium to coarse	WNMG 080404 PS	12.70	4.76	5.16	0.4					●
	080408 PS				0.8					●
 Roughing	WNMG 080404	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408				0.8	●	●	●	●	●
 Mild steel and finishing	WNMG 080404 XP	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 XP				0.8	●	●	●	●	●
 Mild steel and medium cutting	WNMG 080404 XQ	12.70	4.76	5.16	0.4	●	●	●	●	●
	080408 XQ				0.8	●	●	●	●	●
 Mild steel and roughing	WNMG 080404 XS	12.70	4.76	5.16	0.8					●

An insert which corner R(RE) dimension is shown with inequality sign(EX: <0.1, <0.2) indicates minus tolerance of corner R(RE)

Inserts (Positive)










Shape Show left hand (L)	Description	Dimensions (mm)					PV710	PV720	PV730	TNG10	TNG20	
		IC dia.	Thick-ness	Hole dia.	RE	Relief angle						
	CCMT 060202 WP	6.35	2.38	2.8	0.2	7°	●	●	●	●	●	
	060204 WP				0.4		●	●	●	●	●	
	060208 WP				0.8		●	●	●	●	●	
Finishing / with wiper edge	CCMT 09T302 WP	9.525	3.97	4.4	0.2	7°	●	●	●	●	●	
	09T304 WP				0.4		●	●	●	●	●	
	09T308 WP				0.8		●	●	●	●	●	
	CCMT 060202 PP	6.35	2.38	2.8	0.2	7°	●	●	●	●	●	
	060204 PP				0.4		●	●	●	●	●	
	CCMT 09T302 PP				9.525		3.97	4.4	0.2	●	●	●
09T304 PP	0.4	●	●	●		●			●			
09T308 PP	0.8	●	●	●		●			●			
Finishing	CCMT 060202 GK	6.35	2.38	2.8	0.2	7°	●	●	●	●	●	
	060204 GK				0.4		●	●	●	●	●	
	CCMT 09T302 GK				9.525		3.97	4.4	0.2	●	●	●
09T304 GK	0.4	●	●	●		●			●			
CCMT 120404 GK	12.70	4.76	5.5	0.4		●			●	●	●	●
120408 GK				0.8	●	●	●	●	●			
CCMT 060202 HQ				6.35	2.38	2.8	0.2	7°	●	●	●	●
060204 HQ	0.4	●	●				●		●	●		
CCMT 09T302 HQ	9.525	3.97	4.4				0.2		●	●	●	●
09T304 HQ				0.4	●	●	●	●	●			
09T308 HQ				0.8	●	●	●	●	●			
Finishing ~ medium	CCGT 060201	6.35	2.38	2.8	0.1	7°	●	●	●	●	●	
	060202				0.2		●	●	●	●	●	
	060204				0.4		●	●	●	●	●	
	CCGT 09T301	9.525	3.97	4.4	0.1	7°	●	●	●	●	●	
	09T302				0.2		●	●	●	●	●	
	09T304				0.4		●	●	●	●	●	
Intermediate cutting	CCMT 09T308	9.525	3.97	4.4	0.8	7°	●	●	●	●		
		CCGT 060201 MFP-SK	6.35	2.38	2.8	<0.1	7°	●	●	●	●	
		060202 MFP-SK				<0.2		●	●	●	●	●
060204 MFP-SK		<0.4				●		●	●	●	●	
Medium finish, sharp edges Specular	CCGT 09T301 MFP-SK	9.525	3.97	4.4	<0.1	7°	●	●	●	●		
	09T302 MFP-SK				<0.2		●	●	●	●	●	
	09T304 MFP-SK				<0.4		●	●	●	●	●	
	CCGT 0602005 MFP-SKS	6.35	2.38	2.8	<0.05	7°	●	●	●	●		
	060201 MFP-SKS				<0.1		●	●	●	●	●	
	060202 MFP-SKS				<0.2		●	●	●	●	●	
Finishes, sharp edges Specular	CCGT 09T3005 MFP-SKS	9.525	3.97	4.4	<0.05	7°	●	●	●	●		
	09T301 MFP-SKS				<0.1		●	●	●	●	●	
	09T302 MFP-SKS				<0.2		●	●	●	●	●	
09T304 MFP-SKS	<0.4	●	●	●	●	●						
		CCET 030101 M R/L-F	3.5	1.4	1.9	<0.1	7°	●	L	L	●	L
		030102 M R/L-F				<0.2		●	L	L	●	L
030104 M R/L-F		<0.4				●		L	L	●	L	
Finishing and sharp edges	CCET 040101 M R/L-F	4.3	1.8	2.3	<0.1	7°	●	L	L	●	L	
	040102 M R/L-F				<0.2		●	L	L	●	L	
	040104 M R/L-F				<0.4		●	L	L	●	L	













Shape Show left hand (L)	Description	Dimensions (mm)					PV710	PV720	PV730	TNG10	TNG20			
		IC dia.	Thick-ness	Hole dia.	RE	Relief angle								
	CCET 060201 MF R/L-U	6.35	2.38	2.8	<0.1	7°	●	●	●	●	●			
	060202 MF R/L-U				<0.2		●	●	●	●	●			
Low feed / sharp edge	CCET 09T301 MF R/L-U	9.525	3.97	4.4	<0.1	7°	●	●	●	●	●			
	09T302 MF R/L-U				<0.2		●	●	●	●	●			
	CCGT 060201 E R/L-U	6.35	2.38	2.8	0.1	7°	●	L	L	L	●			
	060202 E R/L-U				0.2		●	●	●	●	●			
	060204 E R/L-U				0.4		●	●	●	●	●			
Low feed and housing available	CCGT 09T301 E R/L-U	9.525	3.97	4.4	0.1	7°	●	●	●	●	●			
	09T302 E R/L-U				0.2		●	●	●	●	●			
	09T304 E R/L-U				0.4		●	●	●	●	●			
	CPMT 080202 PP	7.94	2.38	3.3	0.2	11°	●	●	●	●	●			
	080204 PP				0.4		●	●	●	●	●			
	CPMT 090302 PP				9.525		3.18	4.4	0.2	●	●	●	●	●
090304 PP	0.4	●	●	●		●			●					
090308 PP	0.8	●	●	●		●			●					
Finishing	CPMT 080204 GP	7.94	2.38	3.3	0.4	11°	●	●	●	●				
	CPMT 090304 GP	9.525	3.18	4.4	0.4	11°	●	●	●	●				
090308 GP	0.8				●		●	●	●					
	CPMH 080204 HQ	7.94	2.38	3.5	0.4	11°	●	●	●	●	●			
	080208 HQ				0.8		●	●	●	●	●			
	CPMH 090304 HQ				9.525		3.18	4.5	0.4	11°	●	●	●	●
090308 HQ	0.8	●	●	●		●			●					
CPMH 080204	7.94	2.38	3.5	0.4		11°			●		●	●	●	
080208				0.8	●		●	●	●	●				
Intermediate cutting	CPMH 090304	9.525	3.18	4.5	0.4	11°	●	●	●	●				
	090308				0.8		●	●	●	●	●			
	CPMT 080204 XP	7.94	2.38	3.3	0.4	11°	●	●	●	●	●			
	CPMT 090304 XP				9.525		3.18	4.4	0.4	11°	●	●	●	●
	090308 XP								0.8		●	●	●	●
Mild steel and finishing	CPMT 090304 XQ	9.525	3.18	4.4		0.4			11°		●	●	●	●
090308 XQ	0.8				●	●	●	●		●				
Mild steel, finished, medium	CPMT 090304 XQ	9.525	3.18	4.4	0.4	11°	●	●	●	●				
	090308 XQ				0.8		●	●	●	●	●			
	CPMH 080204 R/L-Y	7.94	2.38	3.5	0.4	11°	●	●	●	●	●			
	090304 R/L-Y				9.525		3.18	4.5	0.4	11°	●	●	●	●
	Finishing ~ medium								DCMX 070202 WP		6.35	2.38	2.8	0.2
070204 WP	0.4	●	●	●		●			●					
070208 WP	0.8	●	●	●	●	●								
Finishing / with wiper edge	DCMX 11T302 WP	9.525	3.97	4.4	0.2	7°	●	●	●	●	●			
	11T304 WP				0.4		●	●	●	●	●			
	11T308 WP				0.8		●	●	●	●	●			

An insert which corner R(RE) dimension is shown with inequality sign(EX: <0.1, <0.2) indicates minus tolerance of corner R(RE)

● : Available R: Only right hand (R) available L: Only left hand (L) available















Inserts (Positive)















Shape Show left hand (L)	Description	Dimensions (mm)					PV710	PV720	PV730	TN610	TN620
		IC dia.	Thick-ness	Hole dia.	RE	Relief angle					
	DCMX 070204 R/L-WP	6.35	2.38	2.8	0.4	7°	●			●	
	DCMX 11T304 R/L-WP	9.525	3.97	4.4	0.4	7°	●			●	
	DCMT 070202 PP 070204 PP	6.35	2.38	2.8	0.2 0.4	7°	●	●	●	●	
	DCMT 11T302 PP 11T304 PP 11T308 PP	9.525	3.97	4.4	0.2 0.4 0.8	7°	●	●	●	●	
	DCMT 070202 GP 070204 GP	6.35	2.38	2.8	0.2 0.4	7°	●	●	●	●	
	DCMT 11T304 GP 11T308 GP	9.525	3.97	0.4	0.4 0.8	7°	●	●	●	●	
	DCMT 070202 GK 070204 GK 070208 GK	6.35	2.38	2.8	0.2 0.4 0.8	7°	●	●	●	●	
	DCMT 11T302 GK 11T304 GK 11T308 GK	9.525	3.97	4.4	0.2 0.4 0.8	7°	●	●	●	●	
	DCMT 070202 HQ 070204 HQ 070208 HQ	6.35	2.38	2.8	0.2 0.4 0.8	7°	●	●	●	●	
	DCMT 11T302 HQ 11T304 HQ 11T308 HQ	9.525	3.97	4.4	0.2 0.4 0.8	7°	●	●	●	●	
	DCGT 070201 070202 070204	6.35	2.38	2.8	0.1 0.2 0.4	7°	●	●	●	●	
	DCGT 11T301 11T302 11T304	9.525	3.97	4.4	0.1 0.2 0.4	7°	●	●	●	●	
	DCMT 11T308	9.525	3.97	4.4	0.8	7°	●	●	●	●	
	DCGT 070201MFP-SK 070202MFP-SK 070204MFP-SK	6.35	2.38	2.8	<0.1 <0.2 <0.4	7°			●		
	DCGT 11T301MFP-SK 11T302MFP-SK 11T304MFP-SK	9.525	3.97	4.4	<0.1 <0.2 <0.4	7°			●		
	DCGT 0702005MFP-SKS 070201MFP-SKS 070202MFP-SKS	6.35	2.38	2.8	<0.05 <0.1 <0.2	7°			●		
	DCGT 11T3005MFP-SKS 11T301MFP-SKS 11T302MFP-SKS 11T304MFP-SKS	9.525	3.97	4.4	<0.05 <0.1 <0.2 <0.4	7°			●		
	DCMT 070204 XP	6.35	2.38	2.8	0.4	7°	●	●	●	●	
	DCMT 11T302 XP 11T304 XP 11T308 XP	9.525	3.97	4.4	0.2 0.4 0.8	7°	●	●	●	●	

Shape Show left hand (L)	Description	Dimensions (mm)					PV710	PV720	PV730	TN610	TN620
		IC dia.	Thick-ness	Hole dia.	RE	Relief angle					
	DCMT 11T304 XQ 11T308 XQ	9.525	3.97	4.4	0.4 0.8	7°	●	●	●	●	
	DCET 070201 M R/L-F 070202 M R/L-F 070204 M R/L-F	6.35	2.38	2.8	<0.1 <0.2 <0.4	7°	●	●	●	●	
	DCET 11T301 M R/L-F 11T302 M R/L-F 11T304 M R/L-F	9.525	3.97	4.4	<0.1 <0.2 <0.4	7°	●	●	●	●	
	DCET 070201 MF R/L-U 070202 MF R/L-U	6.35	2.38	2.8	<0.1 <0.2	7°	●			●	
	DCET 11T301 MF R/L-U 11T302 MF R/L-U	9.525	3.97	4.4	<0.1 <0.2	7°	●			●	
	DCGT 070201 E R/L-U 070202 E R/L-U 070204 E R/L-U	6.35	2.38	2.8	0.1 0.2 0.4	7°	●			●	
	DCGT 11T301 E R/L-U 11T302 E R/L-U 11T304 E R/L-U	9.525	3.97	4.4	0.1 0.2 0.4	7°	●	R	R	●	
	DCET 11T301 MF R/L-J 11T302 MF R/L-J	9.525	3.97	4.4	<0.1 <0.2	7°	●			●	
	DCGT 11T301 E R/L-J 11T302 E R/L-J 11T304 E R/L-J	9.525	3.97	4.4	0.1 0.2 0.4	7°	●	R	R	●	
	RCMX 1003 M0	10.0	3.18	3.6	-	7°		●		●	
	RCMX 1204 M0	12.0	4.76	4.2	-	7°		●		●	
	SCMT 09T304 HQ 09T308 HQ	9.525	3.97	4.4	0.4 0.8	7°	●	●	●	●	
	SPMR 090304 G 090308 G	9.525	3.18	-	0.4 0.8	11°		●		●	
	SPMR 120304 G 120308 G	12.7	3.18	-	0.4 0.8	11°		●		●	
	SPGR 090304 R/L 090308 R/L	9.525	3.18	-	0.4 0.8	11°	●	●	●	●	
	SPGR 120304 R/L 120308 R/L	12.7	3.18	-	0.4 0.8	11°	●	●	●	●	
	SPMN 120308 120312	12.7	3.18	-	0.8 1.2	11°	●	●	●	●	

An insert which corner R(RE) dimension is shown with inequality sign(EX: <0.1, <0.2) indicates minus tolerance of corner R(RE)









Inserts (Positive)









Shape Show left hand (L)	Description	Dimensions (mm)						PV710	PV720	PV730	TN610	TN620
		IC dia.	Thick-ness	Hole dia.	RE	Relief angle						
 Finishing	TBMT 060102 DP	3.97	1.59	2.3	0.2	5°	●	●	●	●	●	
	TBMT 060104 DP				0.4		●	●	●	●	●	
 Finishing	TBGT 060102 R/L	3.97	1.59	2.3	0.2	5°	●	●	●	●	●	
	TBGT 060104 R/L				0.4		●	●	●	●	●	
 Finishing / with wiper edge	TCMX 090204 WP	5.56	2.38	2.5	0.4	7°	●	●	●	●	●	
	TCMX 110204 WP	6.35	2.38	2.8	0.4	7°	●	●	●	●	●	
 Finishing ~ medium	TCMT 090202 HQ	5.56	2.38	2.5	0.2	7°	●	●	●	●	●	
	TCMT 090204 HQ				0.4		●	●	●	●	●	
	TCMT 110202 HQ	6.35	2.38	2.8	0.2	7°	●	●	●	●	●	
TCMT 110204 HQ	0.4				●		●	●	●	●		
TCMT 110208 HQ				0.8		●	●	●	●	●		
TCMT 16T304 HQ		9.525	3.97	4.4	0.4	7°	●	●	●	●		
TCMT 16T308 HQ					0.8		●	●	●	●		
 Finishing / with wiper edge	TPMX 090202 WP	5.56	2.38	2.8	0.2	11°	●	●	●	●	●	
	TPMX 090204 WP				0.4		●	●	●	●	●	
TPMX 090208 WP					0.8		●	●	●	●		
 Finishing / with wiper edge	TPMX 110302 WP	6.35	3.18	3.3	0.2	11°	●	●	●	●	●	
	TPMX 110304 WP				0.4		●	●	●	●	●	
TPMX 110308 WP					0.8		●	●	●	●		
 Finishing / with wiper edge	TPMX 110304 R/L-WP	6.35	3.18	3.3	0.4	11°	●			●		
 Finishing	TPMT 090202 PP	5.56	2.38	2.8	0.2	11°	●	●	●	●	●	
	TPMT 090204 PP				0.4		●	●	●	●	●	
 Finishing	TPMT 110302 PP	6.35	3.18	3.3	0.2	11°	●	●	●	●	●	
	TPMT 110304 PP				0.4		●	●	●	●	●	
TPMT 110308 PP					0.8		●	●	●	●		
 Finishing	TPMT 090202 GP	5.56	2.38	2.8	0.2	11°	●	●	●	●	●	
	TPMT 090204 GP				0.4		●	●	●	●	●	
 Finishing	TPMT 110304 GP	6.35	3.18	3.3	0.4	11°	●	●	●	●	●	
	TPMT 110308 GP				0.8		●	●	●	●	●	
TPMT 160304 GP		9.525	3.18	4.4	0.4	11°	●	●	●	●		
 Finishing ~ medium	TPMT 090202 HQ	5.56	2.38	2.8	0.2	11°	●	●	●	●	●	
	TPMT 090204 HQ				0.4		●	●	●	●	●	
 Finishing ~ medium	TPMT 110302 HQ	6.35	3.18	3.3	0.2	11°	●	●	●	●	●	
	TPMT 110304 HQ				0.4		●	●	●	●	●	
TPMT 110308 HQ					0.8		●	●	●	●		
 Finishing ~ medium	TPMT 160302 HQ	9.525	3.18	4.4	0.2	11°	●	●	●	●	●	
	TPMT 160304 HQ				0.4		●	●	●	●	●	
TPMT 160308 HQ					0.8		●	●	●	●		

Shape Show left hand (L)	Description	Dimensions (mm)						PV710	PV720	PV730	TN610	TN620
		IC dia.	Thick-ness	Hole dia.	RE	Relief angle						
 Mild steel and finishing	TPMT 090204 XP	5.56	2.38	2.8	0.4	11°	●	●	●	●	●	
	TPMT 110304 XP	6.35	3.18	3.3	0.4	11°	●	●	●	●	●	
TPMT 110308 XP	0.8				●		●	●	●	●		
 Mild steel and finishing	TPMT 160304 XP	9.525	3.18	4.4	0.4	11°	●	●	●	●	●	
	TPMT 160308 XP				0.8		●	●	●	●	●	
 Mild steel, finished, medium	TPMT 110304 XQ	6.35	3.18	3.3	0.4	11°	●	●	●	●	●	
	TPMT 160308 XQ				0.8		●	●	●	●	●	
 Finishing	TPGH 080202 R/L	4.76	2.38	2.3	0.2	11°	L	●	●	L	●	
	TPGH 080204 R/L				0.4		L	●	●	L	●	
 Finishing	TPGH 090202 R/L	5.56	2.38	3.0	0.2	11°	L	●	●	L	●	
	TPGH 090204 R/L				0.4		L	●	●	L	●	
 Finishing	TPGH 110202 R/L	6.35	2.38	3.5	0.2	11°	L	L	L	L	L	
	TPGH 110204 R/L				0.4		L	L	L	L	L	
 Finishing	TPGH 110302 R/L	6.35	3.18	3.3	0.2	11°	L	●	●	L	●	
	TPGH 110304 R/L				0.4		L	●	●	L	●	
TPGH 110308 R/L					0.8		●	●	●	●		
 Finishing	TPGH 160302 R/L	9.525	3.18	4.5	0.2	11°	●	●	●	●	●	
	TPGH 160304 R/L				0.4		L	L	L	L	L	
TPGH 160308 R/L					0.8		L	L	L	L		
 Medium	TPGH 110302 L-H	6.35	3.18	3.3	0.2	11°	L	L	L	L	L	
	TPGH 110304 R/L-H				0.4		L	●	●	L	●	
TPGH 110308 L-H					0.8		L	L	L	L		
 Medium	TPGH 160304 L-H	9.525	3.18	4.5	0.4	11°	L	L	L	L	L	
	TPGT 160402 L-H				0.2		L	L	L	L	L	
TPGT 160404 L-H					0.4		L	L	L	L		
 Without chipbreaker	TPGB 080204	4.76	2.38	2.3	0.4	11°	●	●	●	●	●	
	TPGB 090204	5.56	2.38	3.0	0.4	11°	●	●	●	●	●	
 Without chipbreaker	TPGB 110204	6.35	2.38	3.5	0.4	11°	●	●	●	●	●	
	TPGB 110302	6.35	3.18	3.3	0.2	11°	●	●	●	●	●	
TPGB 110304	0.4				●		●	●	●	●		
TPGB 110308				0.8		●	●	●	●	●		
 Without chipbreaker	TPGB 160304	9.525	3.18	4.5	0.4	11°	●	●	●	●	●	
	TPGB 160308				0.8		●	●	●	●	●	
 Finishing	TPMR 110304 GP	6.35	3.18	-	0.4	11°	●	●	●	●	●	
	TPMR 160304 GP	9.525	3.18	-	0.4	11°	●	●	●	●	●	
 Finishing ~ medium	TPMR 110304 HQ	6.35	3.18	-	0.4	11°	●	●	●	●	●	
	TPMR 110308 HQ				0.8		●	●	●	●	●	
 Finishing ~ medium	TPMR 160304 HQ	9.525	3.18	-	0.4	11°	●	●	●	●	●	
	TPMR 160308 HQ				0.8		●	●	●	●	●	

● : Available R: Only right hand (R) available L: Only left hand (L) available

Inserts (Positive)

Shape Show left hand (L)	Description	Dimensions (mm)					PV710	PV720	PV730	TNG10	TNG20
		IC dia.	Thick-ness	Hole dia.	RE	Relief angle					
 Medium	TPMR 110304 G	6.35	3.18	-	0.4	11°	●	●	●	●	
	TPMR 160304 G	9.525	3.18	-	0.4	11°	●	●	●	●	
	160308 G				0.8						
 Medium	TPMR 110304 110308	6.35	3.18	-	0.4 0.8	11°	●	●	●	●	
	TPMR 160304 160308	9.525	3.18	-	0.4 0.8	11°	●	●	●	●	
 Medium	TPGR 110302 L-A 110304 L-A	6.35	3.18	-	0.2 0.4	11°	L	L	L	L	
	TPGR 110304 L-B 110308 L-B	6.35	3.18	-	0.4 0.8	11°	L	L	L	L	
	TPGR 160302 R/L-B 160304 R/L-B 160308 R/L-B	9.525	3.18	-	0.2 0.4 0.8	11°	●	●	●	●	
	TPGR 160304 R/L-C 160308 R/L-C	9.525	3.18	-	0.4 0.8	11°	●	●	●	●	
 Without chipbreaker	TPGN 110304 110308	6.35	3.18	-	0.4 0.8	11°	●	●	●	●	
	TPGN 160304 160308	9.525	3.18	-	0.4 0.8	11°	●	●	●	●	
 Finishing	VBMT 110302 PP 110304 PP 110308 PP	6.35	3.18	2.8	0.2 0.4 0.8	5°	●	●	●	●	
	VBMT 160404 PP 160408 PP 160412 PP	9.525	4.76	4.4	0.4 0.8 1.2	5°	●	●	●	●	
	VBMT 110304 GP	6.35	3.18	2.8	0.4	5°	●	●	●	●	
 Finishing	VBMT 160404 GP 160408 GP	9.525	4.76	4.4	0.4 0.8	5°	●	●	●	●	
	VBMT 110302 VF 110304 VF 110308 VF	6.35	3.18	2.8	0.2 0.4 0.8	5°	●	●	●	●	
 Finishing	VBMT 160402 VF 160404 VF 160408 VF 160412 VF	9.525	4.76	4.4	0.2 0.4 0.8 1.2	5°	●	●	●	●	
	VBMT 110304 HQ 110308 HQ	6.35	3.18	2.8	0.4 0.8	5°	●	●	●	●	
	VBMT 160404 HQ 160408 HQ 160412 HQ	9.525	4.76	4.4	0.4 0.8 1.2	5°	●	●	●	●	
 Finishing / sharp edge	VBET 110301 M R/L-F 110302 M R/L-F	6.35	3.18	2.8	<0.1 <0.2	5°	●	●	●	●	

Shape Show left hand (L)	Description	Dimensions (mm)					PV710	PV720	PV730	TNG10	TNG20
		IC dia.	Thick-ness	Hole dia.	RE	Relief angle					
 Finishing / sharp edge	VBGT 110301 R-F 110302 R-F	6.35	3.18	2.8	0.1 0.2	5°		R	R	R	
	VBET 110302 M R/L-Y 110304 M R/L-Y	6.35	3.18	2.8	<0.2 <0.4	5°	●	●	●	●	
 Finishing - medium	VBGT 110301 R-Y 110302 R/L-Y 110304 R/L-Y	6.35	3.18	2.8	0.1 0.2 0.4	5°		R	R	R	
	VBGT 160402 R/L-Y 160404 R/L-Y	9.525	4.76	4.4	0.2 0.4	5°	●	●	●	●	
 Finishing - medium	VCMT 080202 PP 080204 PP	4.76	2.38	2.3	0.2 0.4	7°	●	●	●	●	
	VCMT 160404 PP 160408 PP	9.525	4.76	4.4	0.4 0.8	7°	●	●	●	●	
 Finishing	VCMT 080202 VF 080204 VF	4.76	2.38	2.3	0.2 0.4	7°	●	●	●	●	
	VCMT 080202 HQ 080204 HQ	4.76	2.38	2.3	0.2 0.4	7°	●	●	●	●	
 Finishing	WBMT 060102 R/L-DP 060104 R/L-DP	3.97	1.59	2.3	0.2 0.4	5°	L	●	L	●	
	WBMT 080202 R/L-DP 080204 R/L-DP	4.76	2.38	2.3	0.2 0.4	5°	L	●	L	●	
 Finishing / sharp edge	WBET 060102 M R/L-F 060104 M R/L-F	3.97	1.59	2.3	<0.2 <0.4	5°	●	L	L	●	
	WBET 080201 M R/L-F 080202 M R/L-F 080204 M R/L-F	4.76	2.38	2.3	<0.1 <0.2 <0.4	5°	●	L	L	●	
	WPMT 110204 GP	6.35	2.38	2.8	0.4	11°		●	●	●	
 Finishing	WPMT 160304 GP	9.525	3.18	4.4	0.4	11°		●	●	●	
	WPMT 110202 HQ 110204 HQ	6.35	2.38	2.8	0.2 0.4	11°	●	●	●	●	
 Finishing - medium	WPMT 160304 HQ 160308 HQ	9.525	3.18	4.4	0.4 0.8	11°	●	●	●	●	


● : Available R: Only right hand (R) available L: Only left hand (L) available

An insert which corner R(RE) dimension is shown with inequality sign(EX: <0.1, <0.2) indicates minus tolerance of corner R(RE)

Case studies

Oil pump Sintered steel

Vc = 160 m/min
ap = 0.2 mm
f = 0.1 mm/rev
Wet
TPGH090204L



Tool life

PV720

Avg. 800 pcs/edge

x 2.7


Competitor K
PVD coated cermet

300 pcs/edge

PV720 shows 2.7 times longer tool life compared to Competitor K (PVD Coated Cermet). (User evaluation)

Ring gear Special alloy steel

Vc = 300 m/min
ap = 0.2 mm
f = 0.2~0.4 mm/rev
Wet
WNMG080404PP



Tool life

PV720

Avg. 10,000 pcs/edge

x 3.3


Competitor L
PVD coated cermet

3,000 pcs/edge

PV720 shows 3.3 times longer tool life compared to Competitor L (PVD coated cermet). (User evaluation)

Drum C30

Vc = 300 m/min
ap = 0.5 mm
f = 0.2~0.3 mm/rev
Wet
CNMG090408HQ



Tool life

TN620

800 pcs/edge

x 1.1-1.4


Competitor M
Cermet

550-750 pcs/edge

TN620 shows 1.1 to 1.4 times longer tool life compared to Competitor M (Cermet). (User evaluation)

Yoke Pin C35

Vc = 75 m/min
ap = 0.15 mm
f = 0.12 mm/rev
Wet
TNGG160404R-S

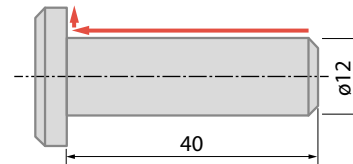

Tool life

TN620

450 pcs/edge

x 1.5


Competitor N
Cermet

300 pcs/edge

TN620 shows 1.5 times longer tool life compared to Competitor N (Cermet). Stable surface roughness and shiny surface finish. No chipping and stable machining. (User evaluation)

Piston C45 Normalized

Vc = 450 m/min
ap = 0.15~0.2 mm
f = 0.04 mm/rev
Wet (Water Soluble)
CNMG120404PP



Tool life

PV710

200 pcs/edge

x 2.2


Competitor O
PVD coated cermet

90 pcs/edge

PV710 shows 2.2 times longer tool life compared to Competitor O (PVD coated cermet). (User evaluation)

Piston 15CrMo4

Vc = 250 m/min
ap = 0.1~0.2 mm
f = 0.08 mm/rev
Wet (Water Soluble)
CNMG120404PP

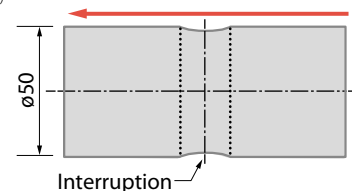

Tool life

PV710

250 pcs/edge

x 1.3

Competitor P
PVD coated cermet


180 pcs/edge

PV710 shows 1.3 times longer tool life compared to Competitor P (PVD coated cermet). (User evaluation)

Case studies

Sprocket 15CrMo4

Vc = 140 m/min
f = 0.09 mm/rev
ap = 0.15-0.30 mm Wet
TPMT110304PP PV730



Tool life

PV730

300 pcs/edge (Stable)

Competitor Q
PVD coated cermet

300 pcs/edge (Unstable)


Improved

Competitor Q (PVD coated cermet) showed unstable machining with adhesion to the insert and chipping.

PV730 maintained a good cutting edge after stable machining of the same number of parts as Competitor Q. (User evaluation)

Flange C55

Vc = 145-230 m/min
f = 0.22 mm/rev
ap = 0.2 mm Wet
TNMG160408HQ PV730

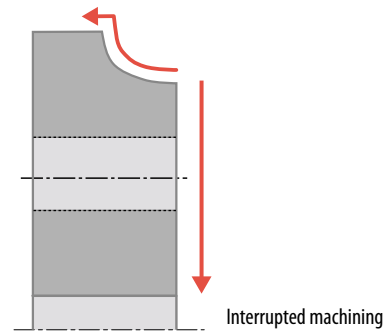

Tool life

PV730

500 pcs/edge

Competitor R
PVD coated cermet

200 pcs/edge

×2.5

PV730 shows 2.5 times longer tool life compared to Competitor R (PVD Coated Cermet).

Superior surface finish

(User evaluation)

Recommended cutting conditions

Cutting speed: Vc (m/min)

	Low carbon steel Low-carbon alloy steel 150 HB or less	Medium-carbon steel Medium-carbon alloy steel 250 HB or less	High-carbon alloy steel 300 HB or less
TN610	150 – 250 – 350		150 – 230 – 300
TN620	100 – 200 – 300		100 – 180 – 250

Cutting speed: Vc (m/min)

	Low carbon steel Low-carbon alloy steel 150 HB or less	Medium-carbon steel Medium-carbon alloy steel 250 HB or less	High-carbon alloy steel 300 HB or less
PV710	150 – 300 – 400		150 – 250 – 330
PV720	100 – 250 – 350		100 – 200 – 280
PV730	100 – 180 – 250		100 – 180 – 250